





Q QuickFit:

The nail board is easily and quickly mounted using the tine mounting and demounting system of the tine holder.

For exchanging tines the nail board is released through two screws, the tines are exchanged and the board is mounted again. Quick and easy.

Mulit-tine holders

In addition to the wide range of tines Wiedenmann offers various multi-tine holders to ensure an even higher operational efficiency.

In the Nail Board for the 5 mm and 8 mm solid tines (8 mm for G 6/160 only) with a tine length of 65 or 135 mm allows you to mount up to 24 tines.



TECHNICAL DATA	G6/135	G6/160			
Working width in cm:	135	160			
Weight in kg (approx.):	558	660			
Working depth in mm with solid / hollow tines up to:	275 / 150	275 / 150			
Dimensions L / W / H in cm approx.:	107 / 182 / 134	107 / 206 / 134			
Mounting:	rear three point cat. I and cat. II				
Drive:	PTO shaft and 3-speed gearbox				
QuickSet / QuickFit / PowerPack / VibraStop:	standard	standard			
Implements:	Solid tines 5, 8, 12, 20 mm / hollow tines 12, 16, 20, 25 mm				
Rear roller:	standard	standard			
Turf retainer:	optional optional				
Swathboard:	optional optional				
Hydraulic rotary brush:	optional optional				
Additional weights:	optional optional				
Nail board for 5 mm, 8 mm solid tines:	optional optional				
Area coverage in continuous operation in m² per hour					
At 2.0 km/h; square hole spacing 110 mm; approx.:	82 holes/m² = 2584 m²/h -				
At 2.4 km/h; square hole spacing 130 mm; approx.:	- $60 \text{ holes/m}^2 = 3620 \text{ m}^2/\text{h}$				
At 1.0 km/h; square hole spacing 55 mm; approx.:	$330 \text{ holes/m}^2 = 1292 \text{ m}^2/\text{h}$	$30 \text{ holes/m}^2 = 1292 \text{ m}^2/\text{h}$ –			
At 1.2 km/h; square hole spacing 65 mm; approx.:	-	240 holes/m² = 1810 m²/h			

From the inventors of professional turf maintenance.

As a manufacturer of professional specialised machines, our entire passion is applied to turf. No matter whether on the golf course, in large sport stadiums around the world, or in the municipalities – the care of professionally also expanded to artificial turf maintenance and dirt and snow removal.

Our high-quality accessory equipment for compact tractors and municipal equipment carriers deliver complete solutions for turf regeneration as well as the collection or removal of grass and leaves. Highly-specific mowing employed lawns and turf are especially close to our heart. We have made this machines, turf sweepers, sweepers for snow and dirt, snow raker blades passion our profession, and thanks to our experience and know-how, we have and winter service spreading machines round off the product range and convince our customers by their efficiency and practicability. No matter what the season, no matter what the purpose – as professionals, we know what professionals need.



Wiedenmann GmbH Am Bahnhof | 89192 Rammingen | GERMANY Phone +49 7345 953-0 | Fax +49 7345 953-233 info@wiedenmann.com

www.wiedenmann.com





Greens TERRA SPIKE®

Deep aeration and removal of compaction to a depth of 30 cm

- · Central tine adjustment- and depth adjustment
- · Integrated damping -, tine mounting and dismounting system
- · Wide range of tools and rear accessories

We love turf. www.wiedenmann.com

Deep aeration and removal of compaction to a depth of 30 cm

Satisfied players are your best customers – so you should achieve a maximum of quality on your turf. We will assist you.

Regular deep spiking and deep aeration is the prerequisite for a healthy growth of roots. After decompacting the ground, the roots can penetrate deeper into the ground and thus will make better use of water and nutrients. The water and air circulation will be improved, thatch will be removed and the shearing strength will be increased.

Often there is only very little time available for performing this job which is especially important for the quality of your turf. Therefore, a high productivity with both an excellent quality of work and an easy operation are important criteria for you when selecting the machine to be used? Well, the Greens TERRA SPIKE® is the ideal machine for you.

The Greens TERRA SPIKE® is predominantly operated on golf greens, but also on other fine turfs. Prior to developing the Greens TERRA SPIKE® the engineers from Wiedenmann listened carefully to the green keepers and groundsmen and made their requirements the basis for the conception of the Greens TERRA SPIKE®. Using most sophisticated 3D CAD technology the requirements of these practical users were realized in the Greens TERRA SPIKE®. Technical reliability and a long service life of the machine were further criteria during the development stage. The individual components were selected and tested carefully. After completing the development stage the Greens TERRA SPIKE® had to undergo long test hours in extreme conditions to proof its reliability and worth. Another important request of the users was the requirement of a multiple utility of the Greens TERRA SPIKE®. This requirement has been met with the System TERRA SPIKE®. For the application

along with the Greens TERRA SPIKE® there is a wide range of tools and rear attachments available, allowing to expand the Greens TERRA SPIKE® into a multi-functional machine which can be operated over the whole year.

This brochure gives you detailed information about the various options.

Greens TERRA SPIKE® – the new dimension of deep aeration which treats your turf gently. When you have mounted the Greens TERRA SPIKE® to your tractor and have lifted it for the first time, you will be surprised at how easy it works. The reason for that is the especially compact direct attachment of the Greens TERRA SPIKE®, which reduces the necessary lifting power considerably. Find out how quick and easily both the working depth and the tine entry angle can be adjusted using the QuickSet. The wide adjustment range of the tine entry angle from 90° up to 65°, which is adjusted centrally through a crank, allows the optimal adjustment of the spiking intensity to the respective ground conditions and the extent of soil compactions. The robust 3-speed gear allows to set the desired hole spacing precisely synchronized to the respective driving speed.

The fact that a firm fit of the tine in the tine holder and still a quick exchange of tines is no contradiction is demonstrated by the QuickFit. This technical detail solution will convince you as well.





The integrated system for mounting and demounting tines allows the quick and trouble-free mounting of the conical 20 mm and 25 mm tines.

Mounting of Tines

- Hand-tighten the tine from below into the tine holder.
- 2 Screw the lock nut tight from above. The tine is now safely tightened in the conical tine holder.

Dismounting

2 Turn the lock nut in the opposite direction, which will press the tine out of

A complete range of solid tines with diameters of 5, 8, 12 and 20 mm, as well

as hollow tines with diameters of 12, 16, 20 and 25 mm, let the Greens TERRA

Using the 5 mm needle tines on Greens TERRA SPIKE® 1,35 m you can achieve

up to 2,000 holes per m², whereas you'll achieve up to 1,450 holes m² with

Greens TERRA SPIKE® 1,60 m. These are optimal prerequisites for light

aeration or for preparing the ground for overseeding.

Afterwards, turn out the tine manually.

Tine programm for every application

SPIKE ® master every job.

Central depth adjustment

You'll be surprised at how quickly and easily the working depth of the Greens TERRA SPIKE® can be set. Transfer the length of the tines you have mounted to the adjustable depth pointer, then set the desired working depth by means of the central depthadjustment crank. Finished. There's no quicker and easier way.


Central adjustment of angle

nent of the tine entry angle.

chieve different spiking intensities by adjusting the entry angle of the

Entry angle	Pivot angle	Stroke (mm)	De _i (m
90°	6°	28	20
85°	13°	50	20
80°	19°	65	20
75°	25°	70	20





VibraStop / PowerPack


Deep aerification and loosening is tough work, both for man and machine. If, for example, a tine strikes a stone during operation, the tine must lift the entire machine within a fraction of a second in order to overcome this obstacle. The jolts and vibrations that inevitably occur when this happens adversely affect not only the deep aerifier, but also the tractor and the tractor driver in the form of damaging jolts and vibrations.

Consequently the quality of work suffers. To eliminate this fundamental drawback, Wiedenmann has developed two independently operating, exclusive damping systems - VibraStop and PowerPack. Together, they perfectly absorb jolts and vibrations caused by extreme compaction or stones. The result is unrivalled smoothness of running with a minimum of strain on the driver, tractor, deep aerifier and tools.

PowerPack VibraStop


Other machines on the market

The tine strikes an obstacle in the soil. The resulting jolt is transmitted undamped to the deep aerifier, the tractor and the tractor driver with damaging effect.



Greens TERRA SPIKE®

The tine strikes the same obstacle in the soil. The VibraStop and PowerPack damping systems are instantly activated, and the resulting jolt is absorbed. This way the strain on the deep aerifier and tractor is reduced to an almost negligible level.



When using hollow tines the cores can be deposited in rows by means of the optional swathboard. This makes the subsequent collection of the cores much easier



Benefits:




Coordination of the hole spacing to the tractor speed with a 3-gear shift.



Protection against damage

VibraStop/PowerPack form an efficient damping system to prevent jolting and




Fast tine replacement

with QuickFit, the simple tine fitting and removal system.



Tool-free adjustment

of the tine angle and the working depth with the QuickSet feature.

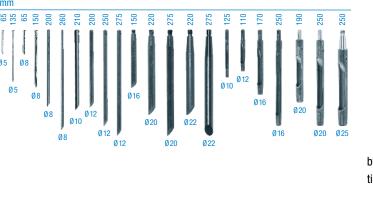

The robust tine holders with largely dimensioned bearings and integrated grease reservoirs even withstand

extreme conditions, such as impact

stresses, dirt and sand.

QuickSet

Change speed gear

and number of tines.

Extremely robust change-speed gear

allows to set the desired hole count in

accordance with the operating speed

Central, tool-free and quick adjustment of tine entry angle (90° up to 65°) and working depth. By means of just one central crank you can easily and quickly make these adjustments which are important for the working quality; regardless of whichever tine length you have mounted or whether the tine is new or



